


Radial Type Choke Inductors PK2W0707 Series



PK2W0707 Series ,Contain high-frequency ferrite. Comparatively large rated current. Power supplies,DC-DC converters.

TVs,VTRs,computers. Computer Peripherals. Telephones,Air-Conditions. Home Electric Appliance. Electronic toys and games.

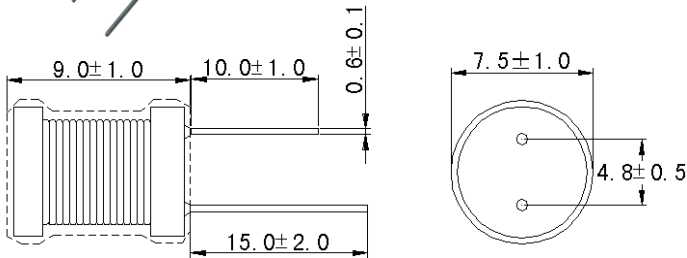

Unit:mm

P/N	L (uH)	Q (min)	DCR(mohm)	MAX	Isat (A)
PK2W0707-1R0M	1.0	90	14.0		5.980
PK2W0707-1R5M	1.5	90	17.0		4.850
PK2W0707-2R2M	2.2	90	17.0		3.560
PK2W0707-3R3M	3.3	90	21.0		2.970
PK2W0707-4R7M	4.7	90	30.0		2.340
PK2W0707-6R8M	6.8	90	54.0		1.980
PK2W0707-100K	10	85	84.0		1.980
PK2W0707-120K	12	85	90.0		1.880
PK2W0707-150K	15	65	110.0		1.650
PK2W0707-180K	18	65	120.0		1.550
PK2W0707-220K	22	65	130.0		1.413
PK2W0707-270K	27	50	140.0		1.278
PK2W0707-330K	33	50	150.0		1.161
PK2W0707-390K	39	50	160.0		1.062
PK2W0707-470K	47	50	220.0		0.972
PK2W0707-560K	56	50	250.0		0.891
PK2W0707-680K	68	40	310.0		0.810
PK2W0707-820K	82	40	340.0		0.729
PK2W0707-101K	100	40	430.0		0.675
PK2W0707-121K	120	40	560.0		0.630
PK2W0707-151K	150	60	940.0		0.531
PK2W0707-181K	180	60	1020.0		0.504
PK2W0707-221K	220	60	1140.0		0.477
PK2W0707-271K	270	60	1290.0		0.432
PK2W0707-331K	330	70	2040.0		0.387
PK2W0707-391K	390	70	2240.0		0.360
PK2W0707-471K	470	70	2510.0		0.333
PK2W0707-561K	560	55	2830.0		0.306
PK2W0707-681K	680	55	3080.0		0.279
PK2W0707-821K	820	55	3410.0		0.261
PK2W0707-102K	1000	75	3900.0		0.189
PK2W0707-122K	1200	75	4420.0		0.180
PK2W0707-152K	1500	75	5110.0		0.162
PK2W0707-182K	1800	75	5810.0		0.144
PK2W0707-222K	2200	75	8380.0		0.135
PK2W0707-272K	2700	75	9590.0		0.126
PK2W0707-332K	3300	75	11040.0		0.117
PK2W0707-392K	3900	75	12500.0		0.108
PK2W0707-472K	4700	75	14300.0		0.099
PK2W0707-562K	5600	70	16000.0		0.090
PK2W0707-682K	6800	70	20900.0		0.081
PK2W0707-822K	8200	70	29200.0		0.072
PK2W0707-103K	10000	70	33400.0		0.063
PK2W0707-123K	12000	70	43100.0		0.054
PK2W0707-153K	15000	70	50500.0		0.054
PK2W0707-183K	18000	70	69100.0		0.045
PK2W0707-223K	22000	70	80600.0		0.036
PK2W0707-273K	27000	70	94200.0		0.027
PK2W0707-333K	33000	70	139000.0		0.018
PK2W0707-393K	39000	70	155600.0		0.018
PK2W0707-473K	47000	70	176600.0		0.018

1. Inductance tested at 2.52MHz,0.1V;
2. SRF>13MHz measured using Agilent / HP8753D network Analyzer;
3. Inductance drop = 10% typ. at rated Isat;
4. ΔT=40°C rise typ. at Irms;
5. Operating temperature range -20°C to +105°C;
6. Electrical specifications at +25°C;

In Bulk Packing

Special inquiries besides the above common used types can be met on your requirement.

FENFA ELECTRONICS LTD.

Address: Rm 621, 6/F., Shing Yip Industrial Building,
19-21 Shing Yip Street, Kwun Tong, Hong Kong
Tel: (852) 2372 0880, Fax: (852) 2372 0131

<http://www.coilsfenfa.com>

fenfa@coilsfenfa.com

FENFA ELECTRONICS (DONGGUAN) CO., LTD.

Address: Xiakeng Industrial District, Changping Town,
Dongguan City, Guangdong, China
Tel: 86-769-86291668 Fax: 86-769-83999028