

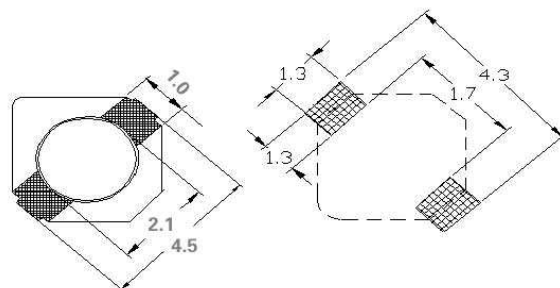


SMD Power Inductors SFD2D11LD Series



SFD2D11LD Series ,Various high power inductors are superior to be high saturation for surface mounting.

Mainly used by power supply for VRT,OA equipment Digital camera,LCD television set notebook PC,partablecommunication equipments,DC/DC converters, etc.



UNIT:mm

PART NO	L(uH)	DCR max (mΩ)	IDC max (A)	TEST FREQ. (Hz)
SFD2D11LD-1R5N-R-S-LF	1.5	68	0.9	100K/1V
SFD2D11LD-2R2N-R-S-LF	2.2	98	0.78	100K/1V
SFD2D11LD-3R3N-R-S-LF	3.3	123	0.6	100K/1V
SFD2D11LD-4R7N-R-S-LF	4.7	170	0.5	100K/1V
SFD2D11LD-6R8N-R-S-LF	6.8	260	0.44	100K/1V
SFD2D11LD-100N-R-S-LF	10	400	0.35	100K/1V

1. Inductance tested at 100KHz,0.1V;
2. SRF>13MHz measured using Agilent / HP8753D network Analyzer;
3. Inductance drop = 10% typ. at rated Isat;
4. $\Delta T=40^{\circ}\text{C}$ rise typ. at Irms;
5. Operating temperature range -40°C to $+125^{\circ}\text{C}$;
6. Electrical specifications at $+25^{\circ}\text{C}$;

Special inquiries besides the above common used types can be met on your requirement.

Packing :
 Reel size: 12 mm
 Quantity: 2000PCS/Reel

FENFA ELECTRONICS LTD.

Address: Rm 621, 6/F., Shing Yip Industrial Building,
 19-21 Shing Yip Street, Kwun Tong, Hong Kong
 Tel: (852) 2372 0880, Fax: (852) 2372 0131
 E-mail: sales@coilsfenfa.com

<http://www.coilsfenfa.com>
fenfa@coilsfenfa.com

FENFA ELECTRONICS (DONGGUAN) CO., LTD.

Address: Xiakeng Industrial District, Changping Town,
 Dongguan City, Guangdong, China
 Tel: 86-769-86291668 Fax: 86-769-83999028
 Hot line: 86-769-89112128 E-mail: fenfa@coilsfenfa.com